


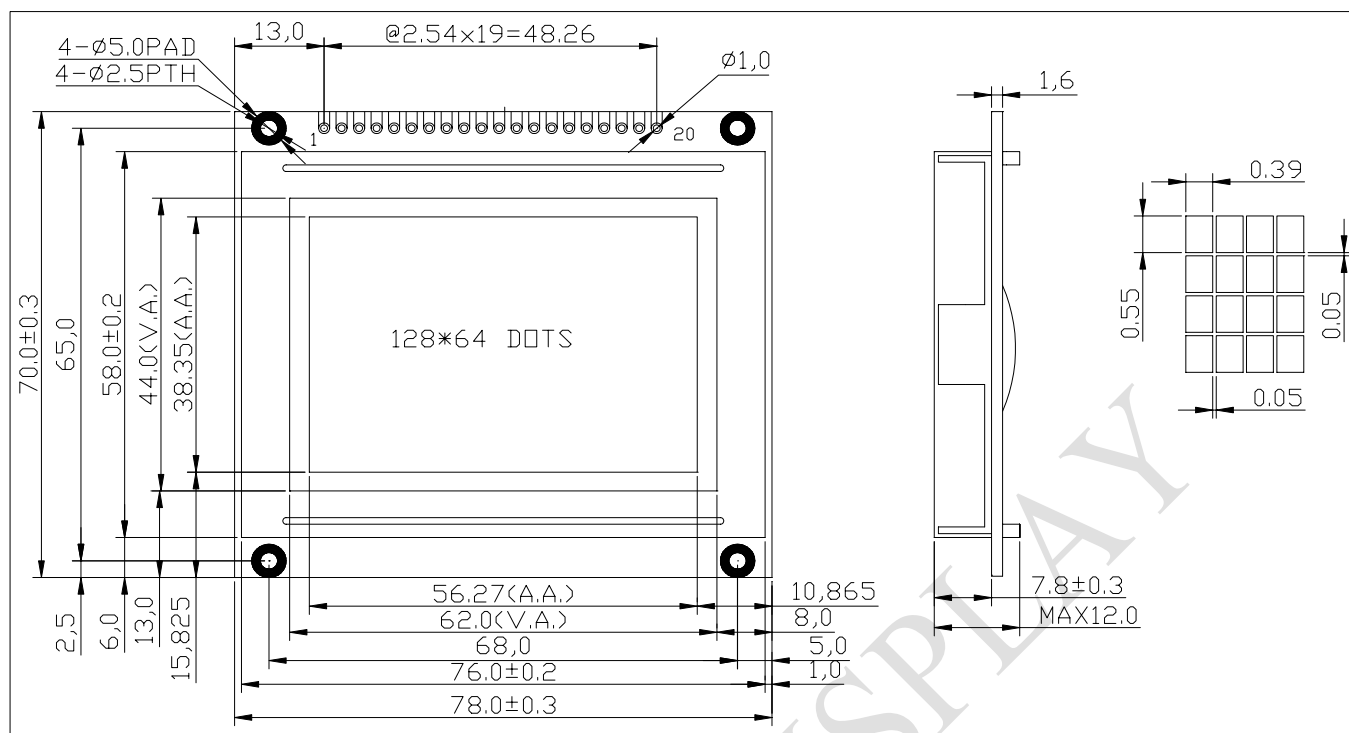

PIN CONNECTIONS

Pin	Symbol	Level	Function
1	/CS1	L	Chip selection for IC1
2	/CS2	L	Chip selection for IC1
3	V _{SS}	0V	GND
4	V _{DD}	+5V	Power supply for logic
5	V _O	-	Operating voltage for LCD
6	RS	H/L	“H” Data, “L” Instruction code
7	R/W	H/L	“H” Read, “L” Write
8	E	H/L	Enable signal
9	DB0	H/L	Data bus line
16	DB7		
17	/REST	L	Reset signal ,active “L”
18	V _{OUT}	-	Negative Voltage output
19	LEDA	+5V	Power supply for LED backlight
20	LEDK	0V	

NOTES:

1. Built-in KS0107/0108 controller
2. +5V/+3.3V power supply optional
3. Temperature compensation optional
4. Blue/yellow mode optional
5. Compatible with. VARITRONIX

MGLS12864/VP12864

MECHANICAL DATA

Item	Nominal Dimensions	Unit
Module Size (W x H x T)	78.0X70.0X12.0	mm
Viewing Area (W x H)	62.0X44.0	mm
Dot Pitch (W x H)	0.44X0.60	mm
Dot Size (W x H)	0.39X0.55	mm

ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Min.	Max.	Unit
Supply Voltage (Logic)	V _{DD} -V _{SS}	-0.3	7.0	V
Supply Voltage (LCD)	V _{DD} -V _O	-0.3	17.5	V
Input Voltage	V _I	-0.3	V _{DD} +0.3	V
Operating Temp.	T _{OPR}	-28	70	
Storage Temp.	T _{STG}	-35	80	

ELECTRICAL CHARACTERISTICS (V_{DD}=5.0V, Ta=25)

Item	Symbol	Min.	Typ.	Max.	Unit
Input High Voltage	V _{IH}	0.8V _{DD}	-	V _{DD}	V
Input Low Voltage	V _{IL}	0	-	0.8	V
Output High Voltage	V _{OH}	2.4	-	V _{DD}	V
Output Low Voltage	V _{OL}	0	-	0.4	V
Supply Current	I _{DD}	-	6	8	mA
LCD Driving Voltage	V _{DD} -V _O	-	10.5	-	V

LED BACKLIGHT SPECIFICATIONS (Ta=25)

Item	Forward Voltage	Forward Current
YELLOW-GREEN	4.1V	440mA
White	3.1V	60mA