


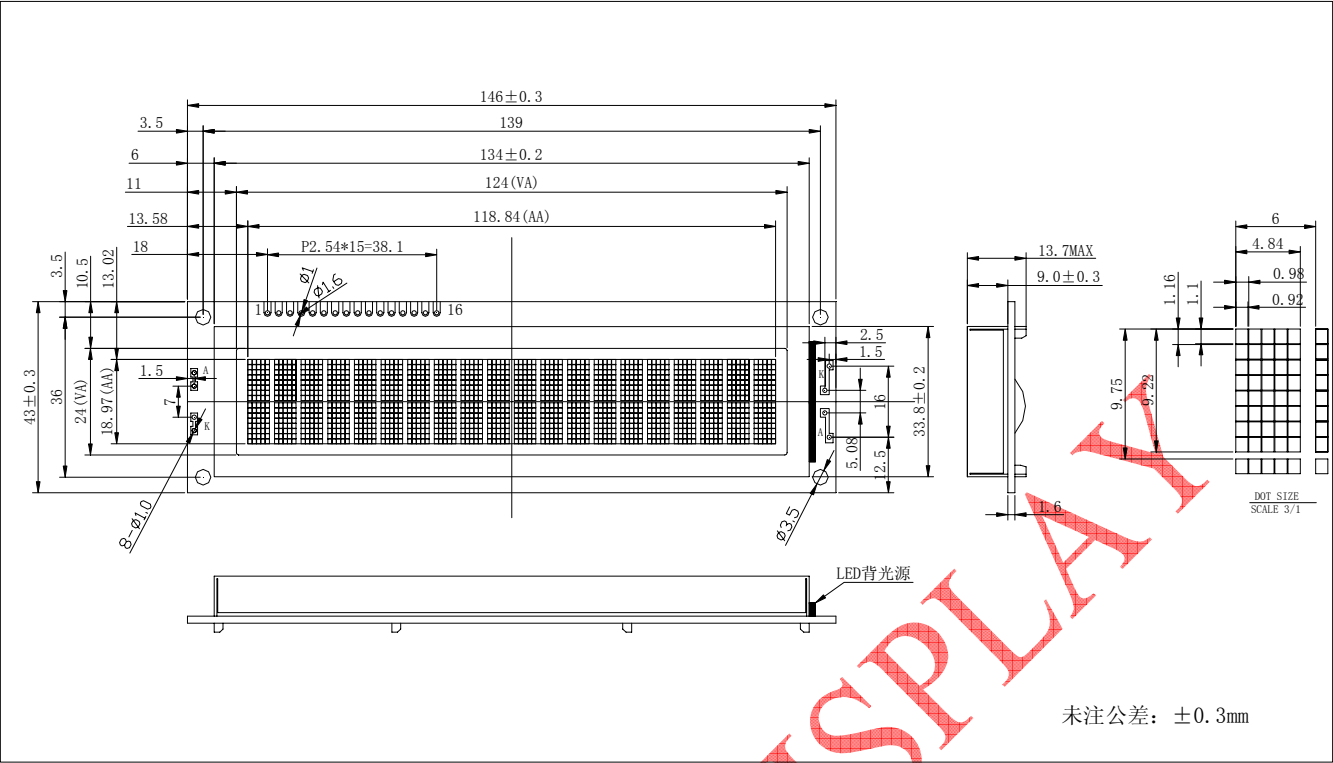

PIN CONNECTIONS

Pin	Symbol	Level	Function
1	V _{SS}	0V	GND
2	V _{DD}	+5V	Power supply for logic
3	V _O	-	Operating voltage for LCD
4	RS	H/L	“H” Data “L” Instruction code
5	R/W	H/L	“H”Read, “L”Write
6	E	H→L	Enable signal IC1
7	DB0	H/L	Data bus
14	DB7		
15	LEDA	+5V	Power supply for LED
16	LEDK	0V	Backlight

NOTES:

- 1.Built-in controller(KS0066 or Equivalent)
- 2.+5V/+3.3V power supply optional.

MECHANICAL DATA

Item	Nominal Dimensions	Unit
Module Size (W x H x T)	146.0X43.0X13.7	mm
Viewing Area (W x H)	124.0 X24.0	mm
Character Size (W x H)	4.84X9.22	mm
Dot Size (W x H)	0.92X1.10	mm

ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Min.	Max.	Unit
Supply Voltage(Logic)	V _{DD} -V _{SS}	-0.3	7.0	V
Supply Voltage(LCD)	V _{DD} - V _O	-0.3	7.0	V
Input Voltage	V _I	-0.3	V _{DD} +0.3	V
Operating Temp	T _{OPR}	-20	70	℃
Storage Temp	T _{STG}	-30	80	℃

ELECTRICAL CHARACTERISTICS(V_{DD}=5V, Ta=25℃)

Item	Symbol	Min.	Typ.	Max.	Unit
Input High Voltage	V _{IH}	2.2	-	V _{DD}	V
Input Low Voltage	V _{IL}	-0.3	-	0.6	V
Output High Voltage	V _{OH}	2.4	-	V _{DD}	V
Output Low Voltage	V _{OL}	0	-	0.4	V
Supply Current	I _{DD}	-	-	-	mA
LCD Driving Voltage	V _{DD} - V _O	-	4.7	-	V

LED BACKLIGHT SPECIFICATION (Ta=25℃)

Item	Forward Voltage	Forward Current
WHITE	3.1V	45mA