


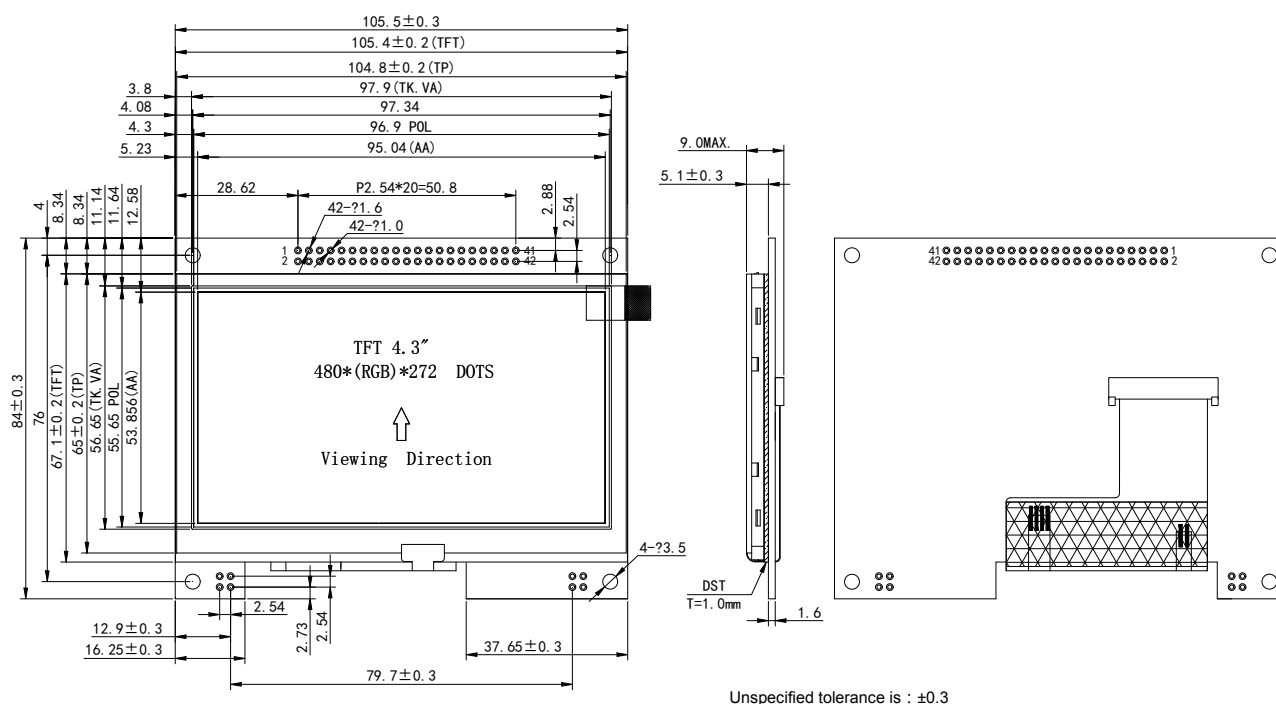

Pin Connections

Pin	Symbol	I/O	Function
1	LED-	0V	Power for LED backlight cathode
2	LED+	13.2V	Power for LED backlight anode
3	GND	0V	Power ground
4	VDD	3.3V	Power supply voltage
5-12	R0-R7	H/L	Red data
13-20	G0-G7	H/L	Green data
21-28	B0-B7	H/L	Blue data
29	GND	0V	Power ground
30	DCLK	H/L	Pixel clock
31	DISP	H/L	Display on/ off
32	HSYNC	H/L	Horizontal sync signal
33	VSYNC	H/L	Vertical sync signal
34	DE	H/L	Data enable
35	NC	-	No connect
36	GND	0V	Power ground
37	NC	-	No connect
38	VDD	3.3V	Power supply voltage
39~ 42	NC	-	No connect

Basic Specifications

Item	Specifications
Size	4.3 inch
Resolution	480×3(RGB)×272
Color depth	16M
Viewing direction	6 o'clock
Operation temperature	-20 ℃ ~70 ℃
Storage temperature	-30 ℃ ~ 80 ℃
Interface type	RGB interface

DC Electrical Characteristics&Backlight Driving Conditions

Item	Symbol	Min.	Typ.	Max.	Unit
Power supply	V _{DD}	3.0	3.3	3.6	V
Supply current	I _{DD}	-	-	-	mA
Input signal voltage	V _{IH}	0.8 V _{DD}	-	V _{DD}	V
	V _{IL}	0	-	0.2 V _{DD}	V
Output signal voltage	V _{OH}	0.8 V _{DD}	-	V _{DD}	V
	V _{OL}	0	-	0.2 V _{DD}	V
Power supply for LED backlight	V _F	-	13.2	-	V
Current for LED backlight	I _F	-	40	-	mA
Operating life time for LED backlight	Ta=25℃and I _F =40mA	-	20000	-	Hrs

Optical Specifications

Item		Symbol	Condition	Min.	Typ.	Max.	Unit
View angles	VERT	θT	CR ≥ 10 (Note)	50	60	-	Degree
		θB		60	70	-	
	HOR	θL		60	70	-	
		θR		60	70	-	
Contrast ratio		CR	θ=0°	400	500	-	-
Chromaticity	White	X	Backlight is on	0.25	0.30	0.35	
		Y		0.25	0.30	0.35	
Luminance		L	Ta=25℃ and I _F =40mA	-	400	-	cd/m ²

Note: T:Top 12 o'clock; B:Bottom 6 o'clock; L:Left 9 o'clock; R:Right 3 o'clock