



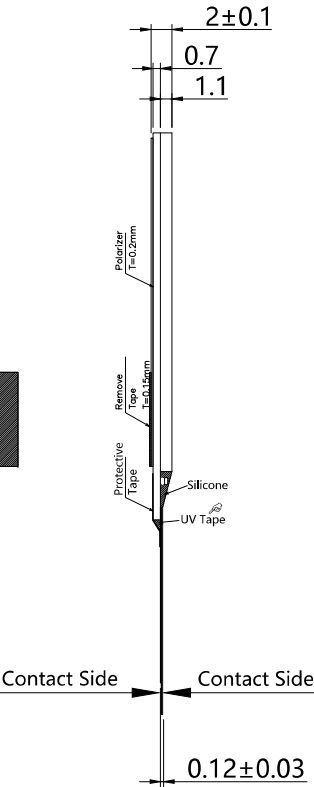


These drawings and specifications are the exclusive properties of , which are furnished for evaluation only on a confidential basis.

www.china-lcdmodules.com

5

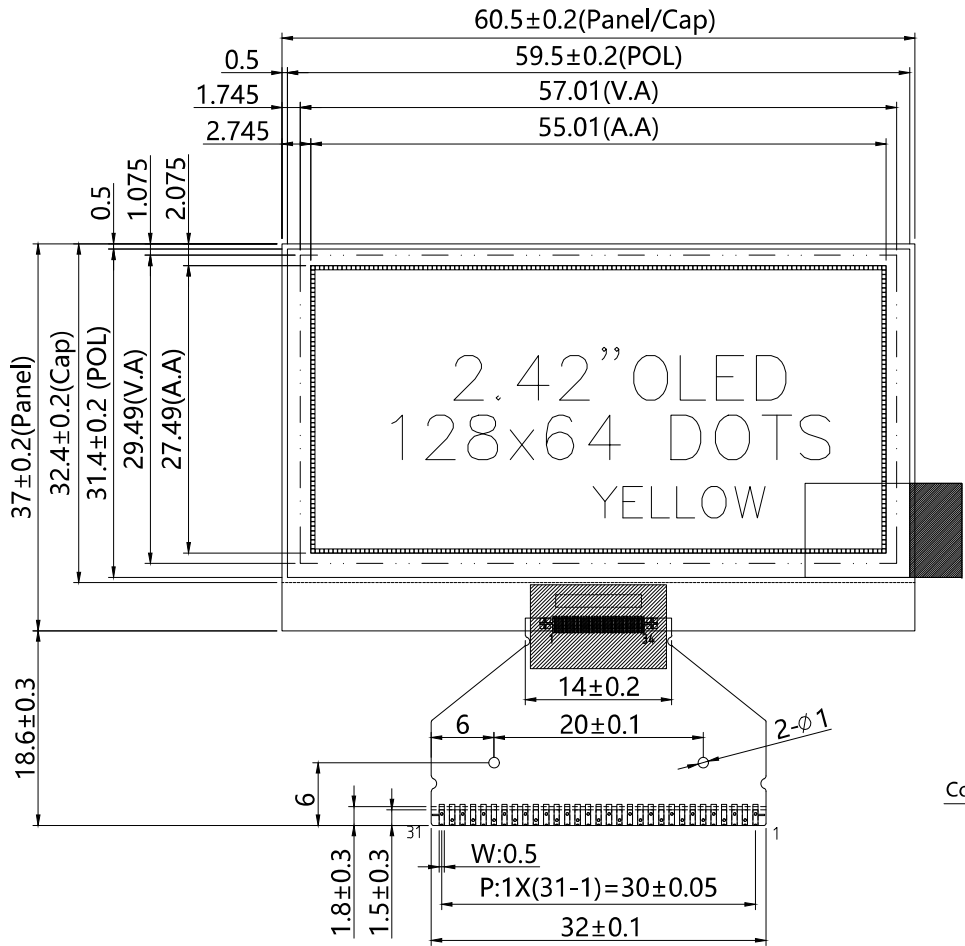

- NOTES:
1. OPERATING TEMP:-40°C TO 70°C
 2. STORAGE TEMP: -40°C TO 80°C
 3. VIEWING DIRECTION:ALL
 4. OLED DRIVE IC: SSD1305Z
 5. DISPLAY COLOR: Yellow
 6. UNSPECIFIED TOLERANCES: ±0.2mm.
 7. () MEANS: DIMENSION FOR REFERENCE
 8. THE PROTECTIVE FILM ON FRONT SIDE OF OLED

Pin Assignment	
NO.	SYMBOL
1	NC
2	VSS
3	NC
4	NC
5	NC
6	NC
7	NC
8	NC
9	NC
10	NC
11	VDD
12	BS1
13	BS2
14	NC
15	CS#
16	RES#
17	D/C#
18	R/W#
19	E/RD#
20	D0
21	D1
22	D2
23	D3
24	D4
25	D5
26	D6
27	D7
28	IREF
29	VCOMH
30	VCC
31	NC